

ETHAN ALLEN®

090516 KILLIAN LINEAR

CHANDELIER/PENDANT LAMP SAFETY INSTALLATION, AND CARE INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

READ THESE INSTRUCTIONS COMPLETELY BEFORE STARTING.

We strongly recommend that all direct-wired lighting products be installed by a licensed electrician. Two people may be required for installation. DO NOT EXCEED the rated bulb wattage. Keep flammable materials away from bulb. This light fixture is shipped with all internal wiring intact. Do not open the product or alter the wiring in any manner.

Installation requires an electrical junction box in the ceiling sufficient to support the weight of the light fixture.

This fixture weighs: 25.1lb. 11.4kg.



WARNING: Be certain that the power to the electrical junction box is turned off at the circuit breaker before installation. Turning the power off at a light switch is not sufficient to prevent electrical shock.

CAUTION: Prior to installation, locate ALL INCLUDED PARTS before disposing of packaging materials.


Tools Required For Installation :	
Screwdrivers	Pliers
Electrical Tape	Wire Connectors
Wire Cutters	Adjustable Wrench

Note: Light bulb(S) are not included, except where required by State of California Title 20. See light fixture for bulb specification. Additional wiring supplies may be required.

Parts Included (See Figure 1):

- A. Wire Connectors
- B. Hot Fixture Wire
- C. Neutral Fixture Wire
- D. Ground Wire
- E. Ground Screw
- F. Mounting Screws
- G. Plastic Anchors
- H. Back Plate
- I. Wood Screws
- J. Ball Nut
- K. Chain
- L. Canopy

Figure 1

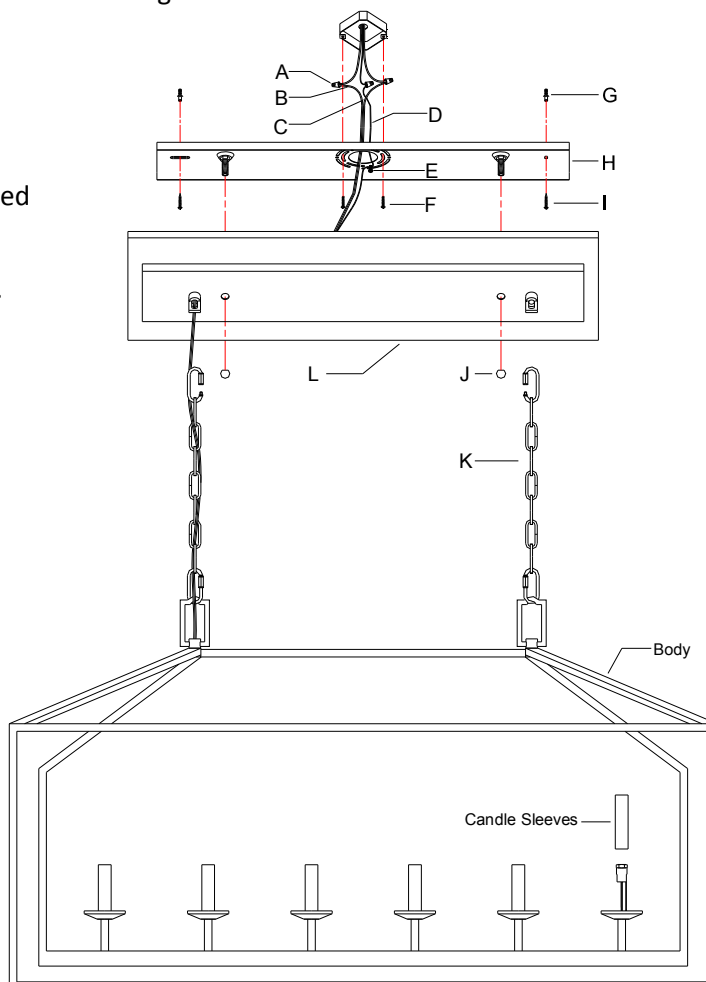

ETHAN ALLEN®

090516 KILLIAN LINEAR

CHANDELIER/PENDANT LAMP SAFETY INSTALLATION, AND CARE INSTRUCTIONS

Installation Procedure (See Figure 1):

1. Carefully unpack all fixture parts and hardware and lay them out on a clean work surface.
2. Holding the Back plate (H) over the Ceiling Junction Box, mark the location for plastic anchors (G) on ceiling. Be sure to check for level before installing plastic anchors. Mount the plastic anchor (G) to the ceiling.
3. Gently pull existing Ground, Hot, and Neutral Junction Box Wires down from the Ceiling Junction Box and allow them to hang.
4. Carefully inspect the chandelier's fixture wires. The Neutral Fixture Wire (C) is ribbed. The Hot Fixture Wire (B) is smooth, and the Ground Wire (D) is in copper.
5. Attach the Ground Wire (D) from the fixture to the Ground Junction Box Wire; it usually has green insulation around it or is bare wire. Fasten them together with a Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. If your Ceiling Outlet Junction Box does not have a Ground Junction Box Wire, insert the Ground Screw (E) into the Canopy (L) where it's marked "Ground", and wrap the fixture's bare ground wire around the Ground Screw (E). Tighten the screw to clamp the Ground Junction Box Wire between the Ground Screw (E) head and the Canopy (L). It is imperative that the Ceiling Junction Box in your home be properly grounded.
6. Connect the Neutral Fixture Wire (C) to the Neutral Junction Box Wire; it usually has white insulation around it. Fasten them together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed.
7. Connect the Hot Fixture Wire (B) to Hot Junction Box Wire; it usually has black insulation around it. Fasten them together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
8. Gently tuck the wire connections neatly into the Ceiling Outlet Junction Box.
9. Secure the Back plate (H) onto the Ceiling Outlet Junction Box, using Mounting Screws (F) and use the wood screws (I) to tighten the back plate. Tighten screws with a Screwdriver until secure.
10. Place the Canopy (L) over the Ceiling Outlet Junction Box, aligning the screws on the back plate (H) with the mounting holes on the canopy (L). Lock it securely with the Ball Nut (J).
11. Place the Candle Sleeves over the sockets.
12. Insert six (6) 40W-maximum Type B candelabra incandescent light bulbs (not included) or six (6) 11W compact fluorescent bulbs (not included) into each socket. Do not exceed the specified wattage.

CARE AND CLEANING:

To clean, wipe the light fixture ONLY with a soft dry cloth.

In the event that the light fixture does not work, contact your local Ethan Allen Design Center.