

ETHAN ALLEN®

093699 / 093702 ZOE 8 LIGHT CHANDELIER

SAFETY, ASSEMBLY, CARE, AND TROUBLESHOOTING

IMPORTANT SAFETY INSTRUCTIONS:

*These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.


***WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.**

*Turn off power at switch before replacing bulbs, making sure fixture has had sufficient time to cool down.


*DO NOT subject the fixture to any shock while lit as shattering of bulbs may result

ASSEMBLY INSTRUCTIONS:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY AT FUSE BOX / CIRCUIT BREAKER.
2. Remove all parts from carton. Do not throw away any parts.
3. Thread tube (T) onto the threaded nipple above the box (S)
4. Lift shade (M) over bottom section of fixture through the canopy(F) and tubes. Slide split washer (R) between shade washer (P) and shade washer (Q).Secure position of shade (M) by turning shade washer (P) clockwise until it rests firmly against split washer (R).
5. Remove mounting bar (B) with tube (D) and loop (E) attached from canopy (F) by loosening collar(G).
6. Affix mounting plate (B) to ceiling outlet box with mounting plate screws (C) provided.
7. Measure desired drop for fixture to hang and add/remove extension tubes (I)/(J)/(K)/(T) as needed. Guide wiring through extension tubes before threading tubes together. TO ADD/REMOVE EXTENSIONS: (Un)Thread the threaded nipple of one extension into the threaded opening of the next extension. Make sure wiring is pulled tight when threading extensions together to prevent damage to the wire**
8. Guide wiring through top tube(H) and hook(U),collar(G), canopy(F) and loop (E) and tube(D).
9. Make proper electrical connections described in steps 10-12.
A LICENSED ELECTRICIAN IS RECOMMENDED.
10. Attach ground wire from fixture (green or silver in color) to ground wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
11. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
12. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
13. Carefully push wire connections back into ceiling outlet box.
14. Lift canopy (F) to ceiling outlet box and secure with collar(G).
14. Connect hook (U) to loop (E).
15. Install proper bulbs into sockets (N).

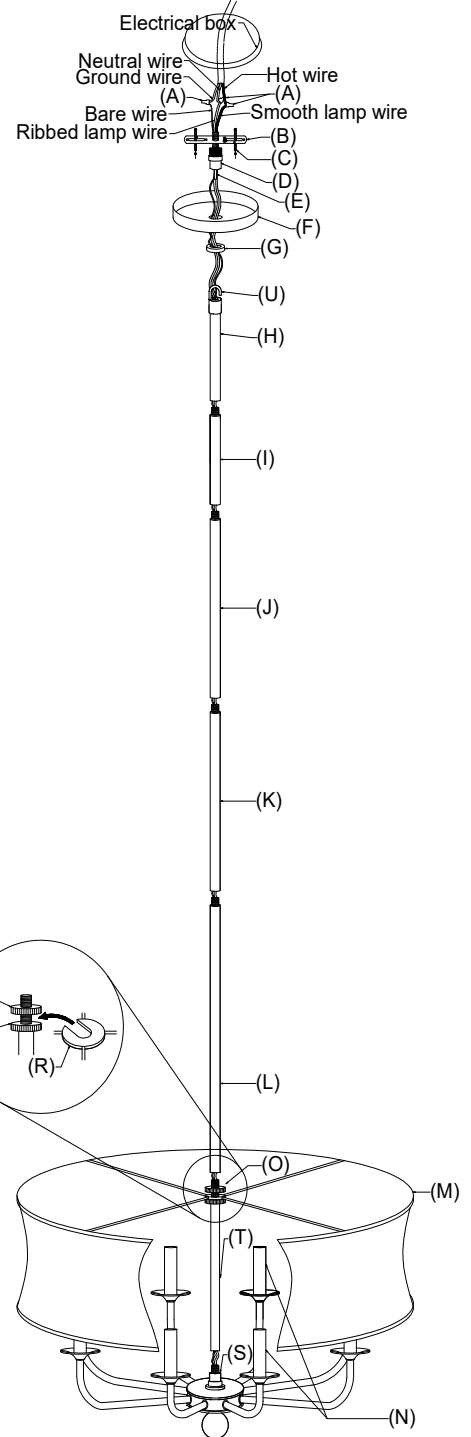

To clean, use soft cloth only. Do not use any chemical or abrasive cleaners.

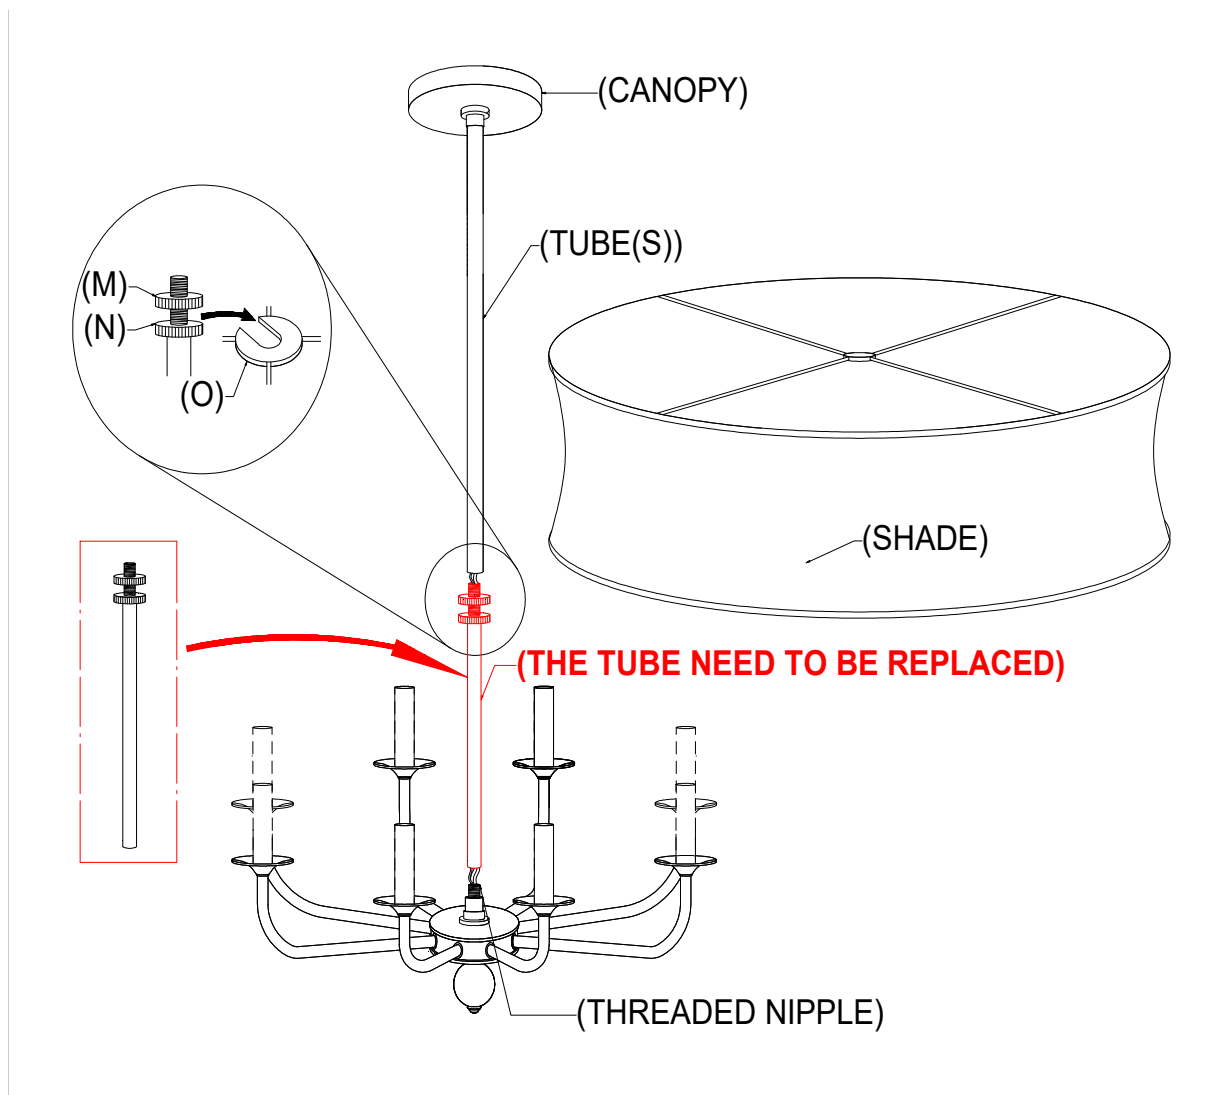

1. Remove the shade out of the lamp by loosening the lock ring (m)
2. Take down the whole lamp
3. Remove the canopy and all tubes and pull the cord out
4. Unscrew the tube with the lock rings on and pull the cord out of this tube too
5. Wire the cord through the replaced tube and lock rings and thread this tube into the nipple
6. Wire the cord through the tubes and canopy in sequence and reassembly the lamp to ceiling.