


ETHAN ALLEN®

093830 CALI 6 LIGHT CHANDELIER

These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of this chandelier. We strongly recommend that all direct wired fixtures be installed by a professional electrician.

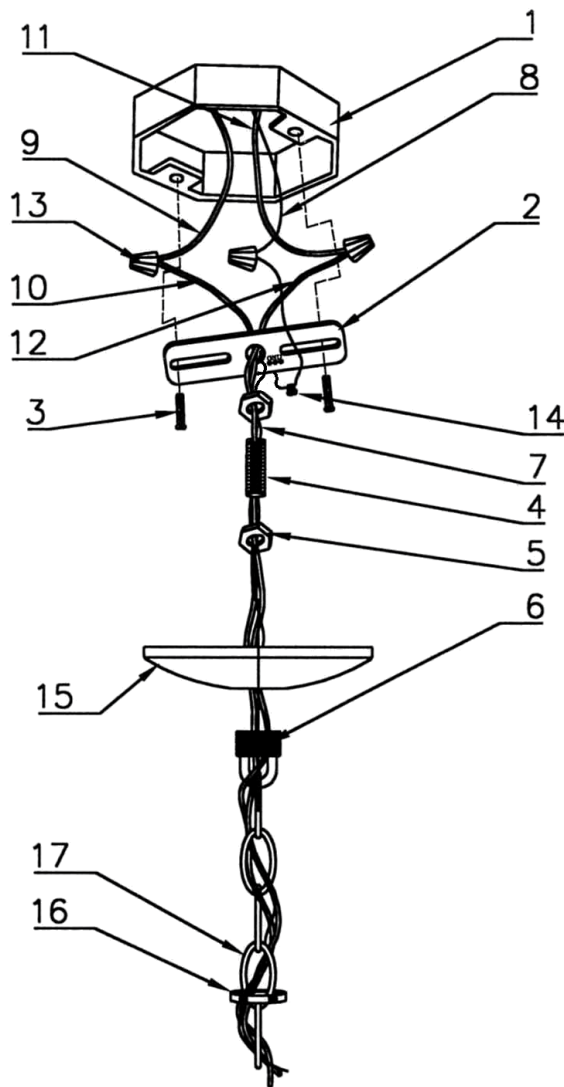

INSTALLATION INSTRUCTIONS

Carefully remove all parts from packaging and check materials thoroughly before disposing of box and packaging.

CAUTION: Do not plug the lamp into electrical outlet before assembly is completed.

1. Take the parts out of the mounting package and thread both 1/8" ips hex nuts (5) several turns onto each end of the nipple (4). Screw the end of the nipple (4) several turns into the threaded hole of the mount bracket (2) but do not tighten the 1/8" ips hex nuts (5). Pull the supply wires (9 & 11) and the supply ground wire (8) out from the outlet box (1) and attach the mounting bracket (2) assembly to the outlet box (1) using the slotted holes of the mounting bracket (2) and the mounting screws (3) provided.
2. Thread the screw collar loop (6) onto the bottom end of the nipple (4). Place the canopy (15) over the outlet box (1) and adjust the screw collar loop (6) and nipple (4) until the midpoint of the outside threads on the screw collar loop (6) is centered (aligned) with the surface of the canopy (15). Remove the canopy (15) and tighten both 1/8" ips hex nuts (5) down on the mounting bracket (2) and the screw collar loop (6).
3. Open up the end links of the chain (17) and attach one end of the chain (17) onto the fixture loop (A) which is already pre-assembled to the nipple (B). Slide the threaded ring (16) and the canopy (15) onto the chain (17) (in that order) and attach the other end of the chain (17) to the screw collar loop (6). Close the ends of the chain links.
4. Unravel the fixture lead wires and fixture ground wire (7) and thread them through every other link of the chain (17) starting with the chain link attached to the fixture loop (A). Feed the fixture lead wires and fixture ground wire (7) through the screw collar loop (6) and nipple (4) assembly. Pull the fixture lead wire and the fixture ground wire (7) upward to remove any excess slack.
5. Attach the power supply wires to the fixture lead wires by connecting the black supply wire (9) to the smooth fixture lead wire (10) and the white supply wire (11) to the ribbed fixture lead wire (12). Loop the fixture ground wire (7) around the ground screw (14) of the mounting bracket (2). (Note: Be sure to provide an extra 3" length of the ground screw (14). Connect the remaining fixture ground wire (7) to the supply ground wire (8) using a wire connector (13). Place wiring and connections inside the outlet box (1).
6. Slide the canopy (15) and the threaded ring (16) up the chain (17). Place the canopy (15) over the outlet box threaded ring (1) and secure it in place by screwing the threaded ring (16) onto the screw collar loop (6).

ETHAN ALLEN®

093830/093831 CALI 6 LIGHT CHANDELIER

ASSEMBLY INSTRUCTIONS

Carefully remove all parts from packaging and check materials thoroughly before disposing of box and packaging.

CAUTION: Do not plug the lamp into electrical outlet before assembly is completed.

1. Remove all parts carefully from the carton.
2. Tighten the loop (A) into the chandelier (B).
3. Hang the chandelier onto the chain at the end with chain link.
4. Screw light bulbs (not included) into the lamp sockets and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.

Care for your chandelier:

Dust with a soft dry cloth. To protect the finish do not use cleaners or abrasives.

WARNING! SPECIAL NOTICE FOR LEADED CRYSTAL:

California Proposition 65 Warning: This product contains lead, a chemical known to the State of California to cause cancer, birth defects, and other reproductive harm. Wash hands after handling.

